


DONN® DX15 System C



System description

- System with 15 mm exposed profiles for an elegant appearance
- Joggled cross tees override the main runners; preventing twisting of the cross tees and giving the junction a professional look with no exposed steel edges
- Colour options available
- Time saving installation with quick hangers SAH150 (optional)
- Easy access to the ceiling void

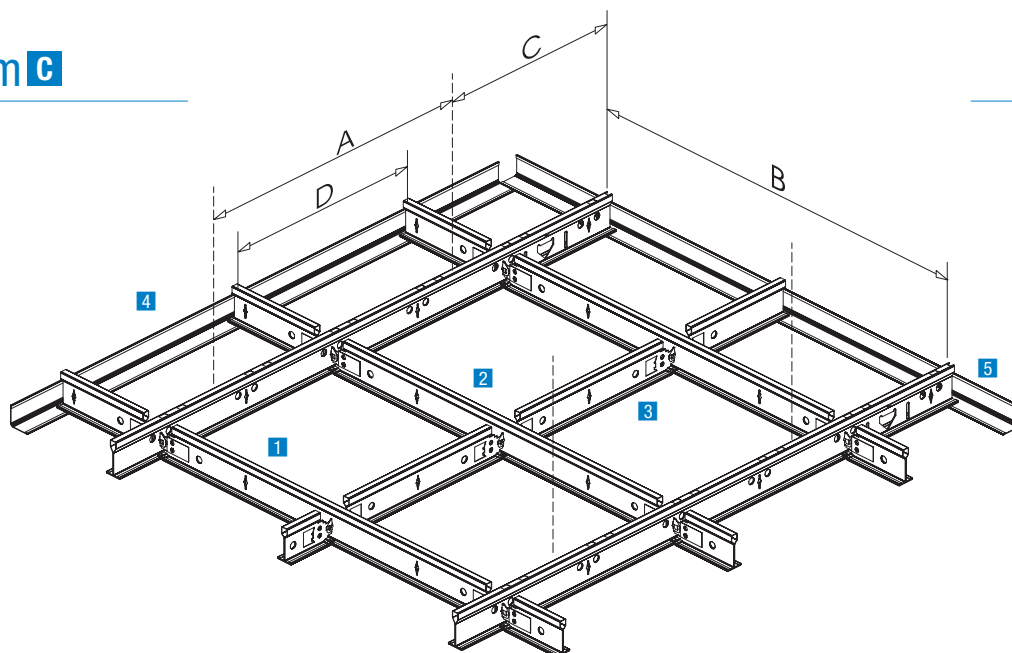

Ref.	Distance (mm)
A	800 to 1500
B	1250 (1200)
C	max. 400
D	625 (600)

Details






Material required for DX15 grid structure (per m² ceiling area)¹⁾

No.	Description	Item reference	Module 625 × 625	Module 625 × 1250	Module 600 × 600	Module 600 × 1200
1	Main runner	DX15 XM 375 W	0.80 m	0.80 m		
		DX15 XM 370 W			0.83 m	0.83 m
2	Long cross tee	DX15 XM 125 W	1.60 m	1.60 m		
		DX15 XM 120 W			1.67 m	1.67 m
3	Short cross tee	DX15 XM 62.5 W	0.80 m			
		DX15 XM 60 W			0.83 m	
4	Hanger	SAH150	0.70 pieces	0.70 pieces	0.70 pieces	0.70 pieces
5	Perimeter trim		Dependent on room dimensions (approx. 0.4 lin. m/m ²)			


¹⁾ All figures are approximate without allowing for waste

Loading table – maximum permissible weight in kg per m² ceiling area

Main runner distances	1250 mm	1250 mm	625 mm	625 mm
Hanger distances A (mm)	Module 625 × 625	Module 625 × 1250	Module 625 × 625	Module 625 × 1250
1000	8.8	9.4	20.0	20.0
1200	6.2	6.6	15.1	15.1
1500	3.0	3.0	7.2	7.5
Note: The load per m ² must be evenly distributed (no extra point loads). After loading, the deflection will remain within the permitted deflection according to class 1 point loads. After loading, the deflection will remain within the permitted deflection according to class 1 (L/500) of EN 13964, provided the grid is layout as shown.				
				


For other grid layouts, loads or hanger distances, please contact KNAUF AMF.

DONN® DX15 System C




Main Runner								
Item reference	Code	Module	Length m	Pieces/ carton	m/ carton	kg/ carton	Cartons/ palett	Notes
Standard White 10								
DX15 XM 375 W ¹⁾	00316221	625	3.750	20	75	21	90	
DX15 XM 370 W ¹⁾	00422724	600	3.700	20	74	20	90	

¹⁾ Other standard colours available for an additional charge. Special colours on request.



Long Cross Tee								
Item reference	Code	Module	Length m	Pieces/ carton	m/ carton	kg/ carton	Cartons/ palett	Notes
Standard White 10								
DX15 XM 125 W ¹⁾	00316213	625	1.250	60	75	17	112	
DX15 XM 120 W ¹⁾	00422726	600	1.200	60	72	16	112	

¹⁾ Other standard colours available for an additional charge. Special colours on request.



Short Cross Tee								
Item reference	Code	Module	Length m	Pieces/ carton	m/ carton	kg/ carton	Cartons/ palett	Notes
Standard White 10								
DX15 XM 62,5 W ¹⁾	00316228	625	0.625	60	37.5	8	112	
DX15 XM 60 W ¹⁾	00316224	600	0.600	60	36	8	112	

¹⁾ Other standard colours available for an additional charge. Special colours on request.